

Declaration of Conformity (DoC)

We,

Jolla Mobile Oy

Polttimonkatu 3, 33210 Tampere, Finland

Declare that the DoC is issued under our sole responsibility and belongs to the following product(s):

Product Type: Jolla Phone (2026)

Trademark: Jolla

Model Number(s): JP2601

System components:

Antenna and antenna gain:

PIFA Antenna: BT/Wi-Fi2.4G: 2.82dBi; Wi-Fi5G: -1.37dBi

GSM 900: -1.17dBi; DCS 1800: 0.45dBi

WCDMA Band I: 0.81dBi; WCDMA Band VIII: -1.17dBi

LTE:

Band 1:0.81dBi

Band 3:0.45dBi

Band 7:-0.44dBi

Band 8:-1.17dBi

Band 20:-3.83dBi

Band 28:-4.13dBi

Band 34:-0.05dBi

Band 38:-1.13dBi

Band 40:-1.36dBi

Band 41:-1.25dBi

5G NR:

Band n1:0.81dBi

Band n3:0.45dBi

Band n7:-0.44dBi

Band n8:-1.17dBi

Band n20:-3.83dBi

Band n28:-4.13dBi

Band n38:-1.13dBi

Band n40:-1.36dBi

Band n41:-1.25dBi

Band n77/78:0.21dBi

FM: Integral Antenna

GPS: PIFA Antenna

NFC: Loop Antenna

Rechargeable Li-ion Battery:

Model: JP2601-BATTERY

Brand: Jolla



Rated Voltage: 3.93 V

Limited Charge Voltage: 4.53 V

Rated Capacity: 5420mAh/21.30Wh

Nominal Capacity: 5520mAh/21.69Wh

Manufacturer: Jolla Mobile Oy

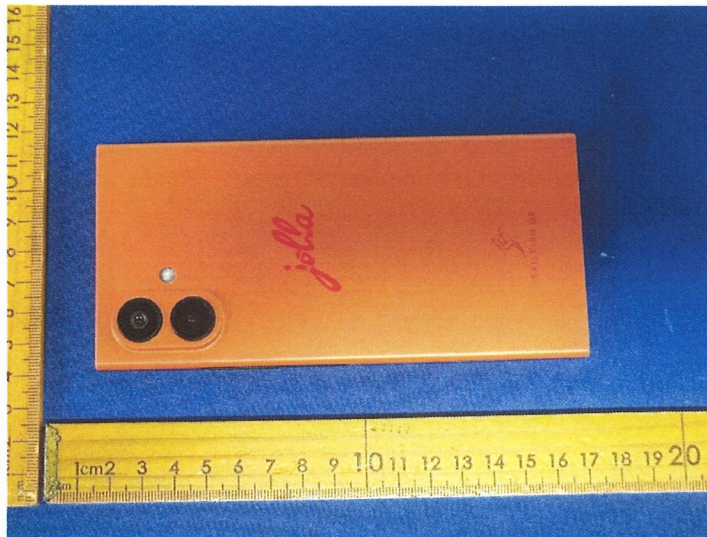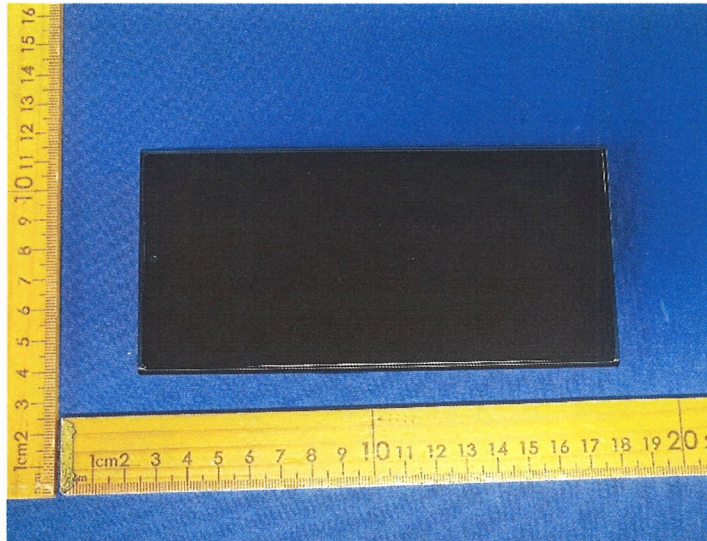

(Product Photo)

The object of the declaration described above is in conformity with the essential requirements of the relevant Union harmonization legislation: Radio Equipment Directive *RED (2014/53/EU)*.

The following *harmonized* standards and technical specifications have been applied:

Health & Safety (Art. 3(1)(a)):

EN 50360:2017+A1:2023
 EN 50566:2017+A1:2023
 EN IEC/IEEE 62209-1528:2021
 EN 50663:2017; EN 62479:2010
 EN IEC 62368-1:2024+A11:2024

EMC (Art. 3(1)(b)):

ETSI EN 301 489-1 V2.2.3 (2019-11)
 ETSI EN 301 489-3 V2.3.2 (2023-01)
 ETSI EN 301 489-17 V3.3.1 (2024-09)
 ETSI EN 301 489-19 V2.2.1 (2022-09)
 ETSI EN 301 489-52 V1.2.1 (2021-11)
 EN 55032:2015+A11:2020
 EN 55035:2017+A11:2020
 EN IEC 61000-3-2:2019+A1:2021
 EN 61000-3-3:2013+A2:2021

Radio Spectrum (Article 3.2):

ETSI EN 300 328 V2.2.2 (2019-07)

ETSI EN 301 893 V2.1.1 (2017-05)
ETSI EN 300 440 V2.2.1 (2018-07)
ETSI EN 301 511 V12.5.1 (2017-03)
ETSI EN 301 908-1 V15.2.1 (2023-01)
ETSI EN 301 908-2 V13.1.1 (2020-06)
ETSI EN 301 908-13 V13.3.1 (2024-10)
ETSI EN 301 908-25 V15.1.1 (2024-10)
ETSI EN 303 413 V1.2.1 (2021-04)
ETSI EN 303 345-1 V1.1.1 (2019-06)
ETSI EN 303 345-3 V1.1.1 (2021-06)
ETSI EN 300 330 V2.1.1 (2017-02)

RF Specification:

Function	Operation Frequency	Max RF output power:
Bluetooth BLE	2402MHz~2480MHz	6.06dBm EIRP
Bluetooth (BR+EDR)	2402MHz~2480MHz	3.21 dBm EIRP
Wi-Fi 2.4G 802.11b/g/n (HT20/40)/ax (HE20/40)	802.11b/g/n (20MHz): 2412~2472MHz 802.11n (40MHz): 2422~2462MHz	14.77dBm EIRP
Wi-Fi 5.2G-5.6G (802.11a/n20/n40/ac 20/ac40/ac80/ax 20/ax40/ax80)	802.11a/ n20/ac20/ax20: 5180-5240MHz 5260-5320MHz 5500-5700MHz 802.11 n40/ac40/ax40: 5190-5230MHz 5270-5310MHz 5510-5670MHz 802.11 ac80/ax80: 5210MHz 5290MHz 5530MHz 5610MHz 5775MHz	9.29dBm EIRP
Wi-Fi 5.8G (802.11a/n20/n40/ac 20/ac40/ac80/ax 20/ax40/ax80)	802.11a/ n20/ac20/ax20: 5745MHz~5825MHz 802.11 n40/ac40/ax40: 5755MHz~5795MHz 802.11 ac80/ ax80: 5775MHz	11.74dBm EIRP
GSM/GPRS 900	TX(Uplink): 880-915 MHz; RX(Downlink): 925-960 MHz	33.54dBm
GSM/GPRS 1800	TX(Uplink): 1710 -1785 MHz; RX(Downlink): 1805 -1880 MHz	30.33 dBm
WCDMA Band I	TX(Uplink): 1920-1980 MHz; RX(Downlink): 2110-2170 MHz	23.50dBm
WCDMA Band VIII	TX(Uplink): 880-915 MHz; RX(Downlink): 925-960 MHz	23.47 dBm
LTE FDD Band 1	TX(Uplink): 1920-1980 MHz; RX(Downlink): 2110-2170 MHz	23.82 dBm
LTE FDD Band 3	TX(Uplink) :1710-1785 MHz; RX(Downlink): 1805-1880 MHz	23.95 dBm
LTE FDD Band 7	uplink 2500MHz to 2570MHz; downlink 2620MHz to 2690MHz	23.81 dBm
LTE FDD Band 8	TX(Uplink): 880MHz to 915 MHz RX(Downlink): 925 MHz to 960 MHz	23.57dBm
LTE FDD Band 20	TX(Uplink): 832 MHz~862 MHz; RX(Downlink): 791 MHz~821 MHz	23.42dBm
LTE FDD Band 28	TX(Uplink): 703 MHz to 748 MHz RX(Downlink): 758 MHz to 803 MHz	23.90dBm
LTE FDD Band 34	uplink 2010MHz to 2025MHz; downlink 2010MHz to 2025MHz	23.81dBm
LTE TDD Band 38	TX(Uplink): 2570 MHz to 2620 MHz RX(Downlink): 2570 MHz to 2620 MHz	23.46dBm
LTE TDD Band 40	Uplink & Downlink: 2300 MHz to 2400 MHz	22.97dBm
LTE TDD Band 41	uplink 2500MHz to 2700MHz; downlink 2500MHz to 2700MHz	22.72dBm

n1	uplink 1920MHz to 1980MHz; downlink 2110MHz to 2170MHz	23.44 dBm
n3	uplink 1710MHz to 1785 MHz; downlink 1805MHz to 1880MHz	23.44 dBm
n7	uplink 2500MHz to 2570 MHz; downlink 2620MHz to 2690MHz	23.45 dBm
n8	uplink 880 MHz to 915 MHz; downlink 925MHz to 960MHz	23.44 dBm
n20	uplink 832MHz to 862MHz; downlink 791MHz to 821MHz	23.44 dBm
n28	uplink 703MHz to 748MHz; downlink 758MHz to 803MHz	23.45 dBm
n38	uplink 2570MHz to 2620MHz; downlink 2570MHz to 2620MHz	23.44 dBm
n40	uplink 2300 to 2400MHz; downlink 2300 to 2400MHz	23.45 dBm
n41	uplink 2496 to 2690MHz; downlink 2496 to 2690MHz	23.44 dBm
n77	uplink 3400MHz to 4200MHz; downlink 3400MHz to 4200MHz	23.43 dBm
n78	uplink 3400MHz to 3800MHz;downlink 3400MHz to 3800MHz	23.45 dBm
NFC	13.56MHz	30.26 dBμA/m@3M
FM	Rx(Downlink): 87.5MHz~108MHz	--
GNSS (GPS L1, Galileo E1, GLONASS G1)	Rx(Downlink): 1559 to 1610 MHz	--

Tests for SAR are conducted using standard operating positions with the device transmitting at its highest certified power level in all tested frequency bands. The maximum SAR values tested on this device when used in its normal position at the ear and when used closet to the body (at a minimum distance of 0mm/5mm) are:

Max SAR Value(W/kg)	10-g Head	0.662
Limit is 2.0(W/kg) for10-g	10-g Body	0.633
Limit is 4.0(W/kg) for10-g	10-g Member DAS	1.008

Technical file held by: Jolla Mobile Oy

Address: Polttimonkatu 3, 33210 Tampere, Finland

Signed for and on behalf of:

Jolla Mobile Oy

Name and Title:

Sami Pienimäki, CEO

Address:

Polttimonkatu 3, 33210 Tampere, Finland



Signature of Authorized Person

2026-06-30